

Surface Mount Switching Diode

Features:

- *High Speed $\leq 4\text{ns}$
- *Low Reverse Leakage Current
- *Small Outline Surface Mount SOD-323 Package


SWITCHING DIODE
200mAMPERS
100VOLTS



SOD-323

SOD-323 Outline Dimensions

Unit:mm

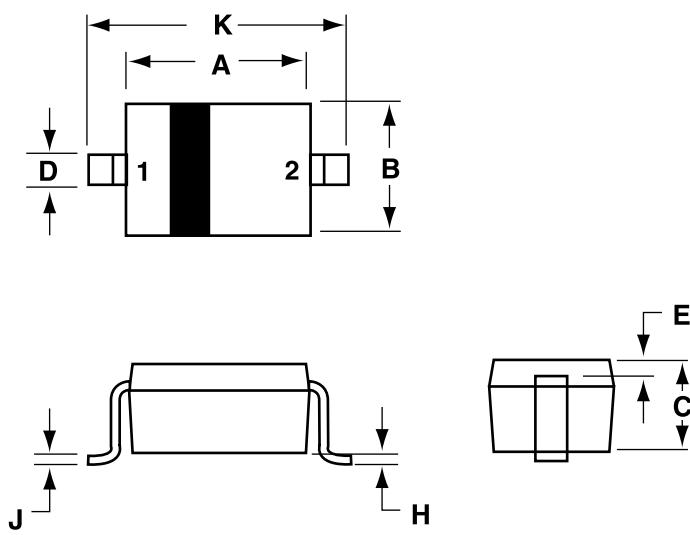

Dim	MILLIMETERS	
	Min	Max
A	1.60	1.80
B	1.15	1.35
C	0.80	1.00
D	0.25	0.40
E	0.15REF	
H	0.00	0.10
J	0.089	0.377
K	2.30	2.70

PIN 1.CATHODE
2.ANODE

Maximum Ratings

Rating	Symbol	Value	Unit
Reverse Voltage	VR	100	Vdc
Forward Current	IF	200	mAdc
Peak Forward Surge Current	IFM(Surge)	500	mAdc

Thermal Characteristics

Characterictics	Symbol	Max	Unit
Total Device Dissipation FR-5 Board TA=25°C Derate Above 25°C	PD	225 1.8	mW mW/°C
Thermal Resistance, Junction to Ambient	R _{θJA}	556	°C/W
Total Device Dissipation Alumina Substrate, ⁽²⁾ TA=25°C Derate Above 25°C	PD	300 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	R _{θJA}	417	°C/W
Junction and Storage Temperature	T _J , T _{stg}	-55 to + 150	°C

Electrical Characteristics (TA=25°C Unless Otherwise note)

Characterictics	Symbol	Min	Max	Unit
-----------------	--------	-----	-----	------


Off Characteristics

Reverse Breakdown Votalge (IR=100μAdc)	V(BR)	100	—	Vcc
Forward Voltage(IF=10mA)	VF	—	1000	mVdc
Reverse Voltage Leakage Current (VR=20Vdc) (VR=75Vdc)	IR	— —	0.025 5.0	μAdc
Diode Capacitance (VR=0, f=1.0MHz)	C _T	—	4.0	pF
Revarse Recover Time (IF=IR=10mA)	trr	—	4.0	ns

1. FR-5=1.0x0.75x0.062 in 2. Alumina=0.4x0.3x0.024 in. 99.5% alumina.

Device Marking

Item	Marking	Eqivalent Circuitdiagram
MMBL914H	5D	1 ○ — ←—○ 2

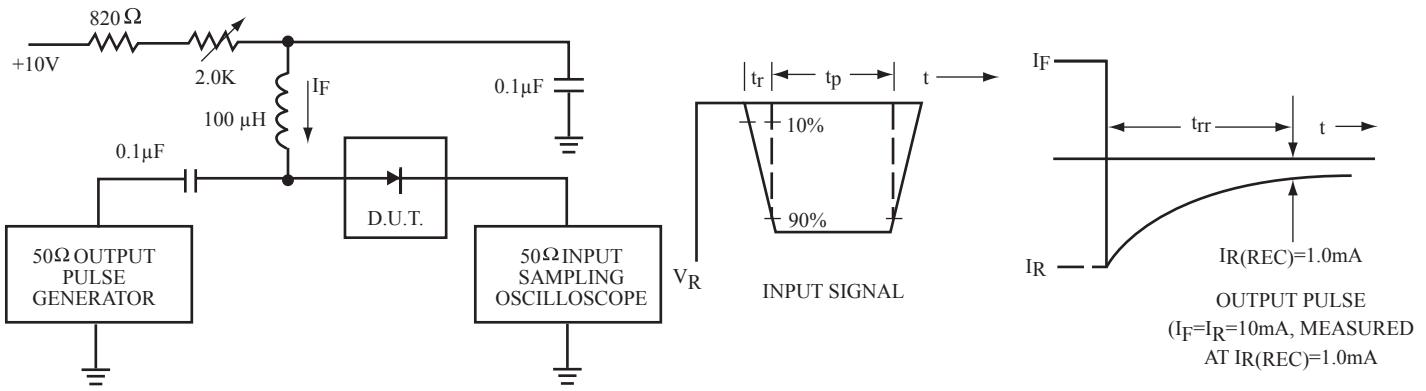

Notes: 1. A 2.0 k Ω variable resistor for a Forward Current (IF) of 10 mA

2. Input pulse is adjusted so I_R (peak) is equal to 10 mA

3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

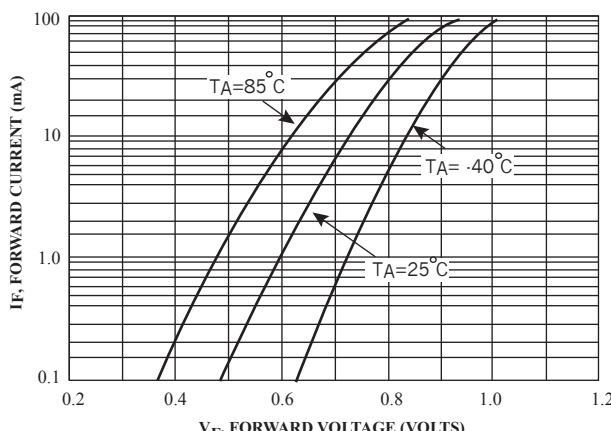


Figure 2. Forward Voltage

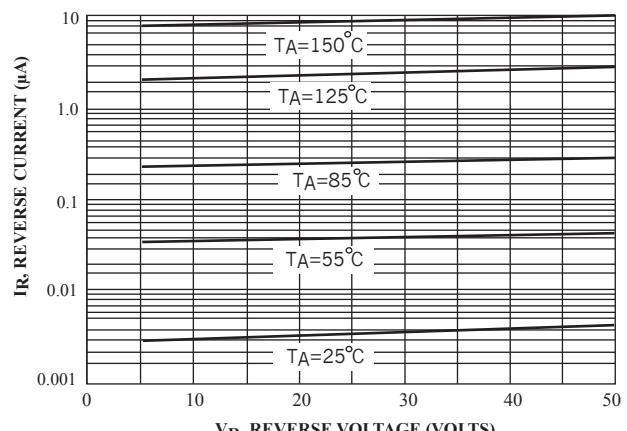


Figure 3. Leakage Current

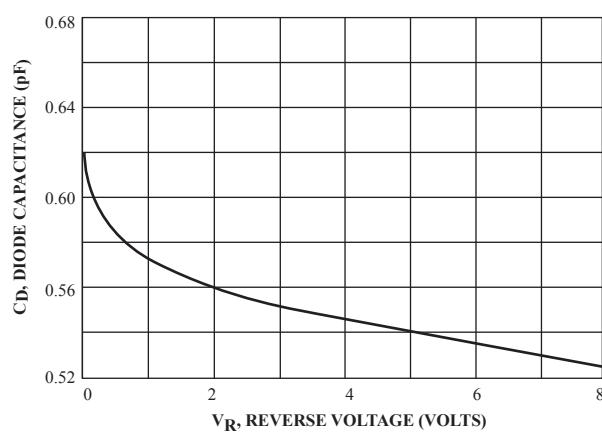


Figure 4. Capacitance