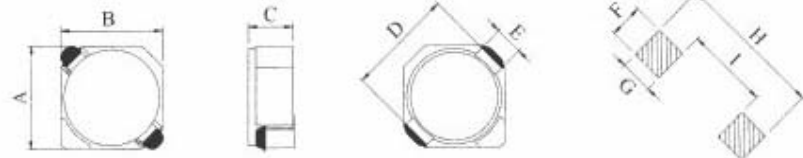
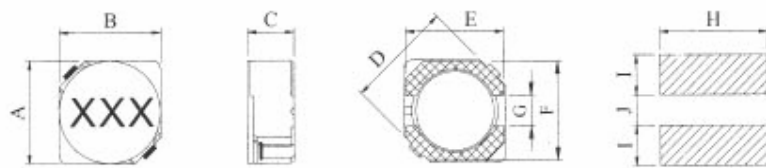
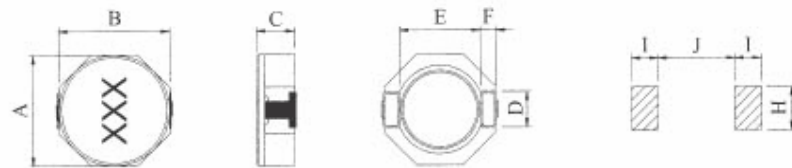


**SHAPES & DIMENSION**


DIMENSION(mm)

LAND PATTERN(mm)


3D16

4D18/4D28/5D18/5D28/6D18/6D28

8D28/8D43
**APPLICATION**

- LCR Monitor
- P.D.A
- Notebook PC
- Power supply for VTR
- Digital camera
- Small size communication equipment

Type	A	B	C	D	E	F	G	H	I	J
GSRHT 3D16	4.0 Max	4.0 Max	1.8 Max	5.2 Max	1.1	1.5	1.4	5.2	2.4	
GSRHT 4D18	5.0 Max	5.0 Max	2.0 Max	6.9 Max	4.5	4.5	1.5	5.3	1.9	1.5
GSRHT 4D28	5.0 Max	5.0 Max	3.0 Max	6.9 Max	4.5	4.5	1.5	5.3	1.9	1.5
GSRHT 5D18	6.0 Max	6.0 Max	2.0 Max	8.2 Max	5.5	5.5	2.0	6.3	2.2	2.0
GSRHT 5D28	6.0 Max	6.0 Max	3.0 Max	8.2 Max	5.5	5.5	2.0	6.3	2.2	2.0
GSRHT 6D28	7.0 Max	7.0 Max	3.0 Max	9.5 Max	6.5	6.5	2.0	7.3	2.7	2.0
GSRHT 6D38	7.0 Max	7.0 Max	4.0 Max	9.5 Max	6.5	6.5	2.0	7.3	2.7	2.0
GSRHT 8D28	8.3 Max	8.3 Max	3.0 Max	2.5	6.3	1.2		2.8	2.0	6.1
GSRHT 8D43	7.3 Max	7.3 Max	4.5 Max	2.5	6.3	1.2		2.8	2.0	6.1

**Features**

- Low profile and square.
- Magnetically shield and low DC resistance.
- Suitable for large currents.
- Excellent solderability and high heat resistance.
- Low cost and packed in embossed carrier tape.